GIGABYTE

Easy Boost utility can control GIGABYTE graphics card's GPU, memory frequency, FAN speed and also have VBIOS update function.

Before update VBIOS, backup original VBIOS is needed. Please follow below step to backup and flash VBIOS for your graphics card.

1. VBIOS backup

Step1


Download Easy Boost utility and install it.

Utility

VGA Tools - Ea	sy Boost	Version	1.04	1
Description	VGA Tools – Easy Boost Support NVIDIA GeForce 20 series ,6000-series models. OS:Windows XP 32bit,Wind 64bit,Windows 7 32bit,Wind	ows XP 64bit,Window		
Download Here	Asia China America Euro	pe Europe(Russia) : F	TP / Http	

Step2

Run Easy Boost and click "BIOS setting"

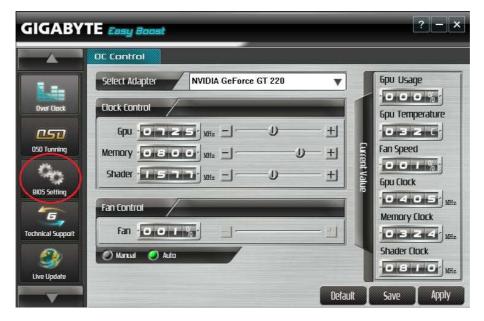

Step3 Click Backup

GIGABY	TE <i>Easy</i> Boost		? – ×
	Bios Setting		
	Model / Location	GV-N220UD-1GI (1, 0, 0)	Т
Over Clock	Bios Information /		
050	Bios Version:	F51	Flash
OSO Tunning	Model Name:	GV-N220UD-1GI	Autoflash
Same.	Model Location:	bus 1, device 0, function 0	Adunash
BID5 Setting			G More
5			
Technical Support			
2			
Live Update			

Step4

Select folder and click "save" to backup VBIOS

🥔 另存新權					-	×
儲存於(I):	闄 BIOS backuj	p	•	G	1 🖻 🖽 🕈	
œ.	名稱	^			修改日期	i
最近的位置		沒	有符合搜尋的項目	•		
夏回						
探證 櫃						
電腦						
	•					×.
網路	檔案名稱(N):	GV-N220UD-1G	I.F51		•	存檔(S)
183.20	存檔類型(T):				-	取消


BIOS backup finish

Easy Boost	
Backup bios file success!	

2. Flash VBIOS

Step1

Run Easy Boost and click "BIOS setting".

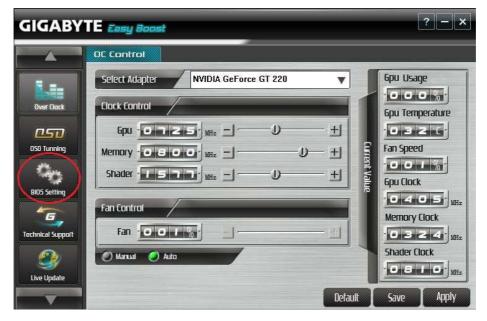

Step 2

Click "Flash"



Step 3 Select VBIOS file and click "open" to flash VBIOS.

開設皆檔		00-001-4-8	*	×
搜尋位置(I):	📕 vga_bios_n	570o13i_f92	- 😋 🗊 📂 🛄 -	
e.	名稱	<u>^</u>	修改日期	
圣沙 最近的位置	N570O13	LF92	2011/12/14 下午	02
桌面				
煤體櫃				
電腦				
G	•	m)
網路	檔案名稱(N):	N5700131.F92	▼ 開啟舊	檔(O)
	檔案類型(T):		 取注 	肖

Step 4

BIOS flash successes click "YES" reboot system to complete BIOS update.

